


HTE 4 & HTT 4

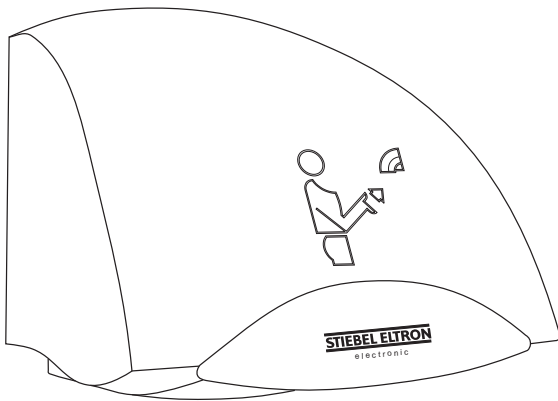

HTE 5 & HTT 5

The **Stiebel Eltron** range of Hand Dryers has been specifically developed for use in all commercial, industrial and public building environments. They are ideally suited for use in Hotels, Restaurants, shops, offices and Factories.

Stiebel Eltron Hand Dryers are the ideal choice wherever hands need to be dried quickly and economically, without having to cope with all the inconvenience and cost associated with using paper or fabric towels. Once installed, they will give years of maintenance-free service, and the automatic "No-Touch" infra red control ensures that they remain economical to run.

HTE 4 and HTT 4 have a very strong impact resistant polypropylene case. For really tough environments, the heavy duty, vandal proof, cast aluminium housing of the HTE 5 and HTT 5 are the best choice.


The HTE 4 has won numerous design awards around the world. This design has a stylish rounded casing that not only looks good but also has a functional side to it as well. This design prevents objects from being placed on top of the unit.

Hand Drying at Turbo Speed


The HTT range of hand dryers dry hands comfortably in around 20 seconds. This is due to the powerful air flow of the units. The HTT 5 AM is a charcoal grey metallic turbo charged model and The HTT 5 SM is a silver metallic turbo charged model.

Dimensions & Spec.


HTE 4 / HTT 4

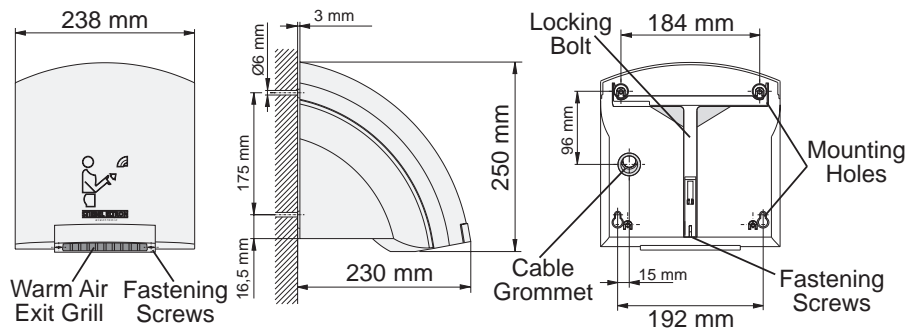

HTE 5 / HTT 5

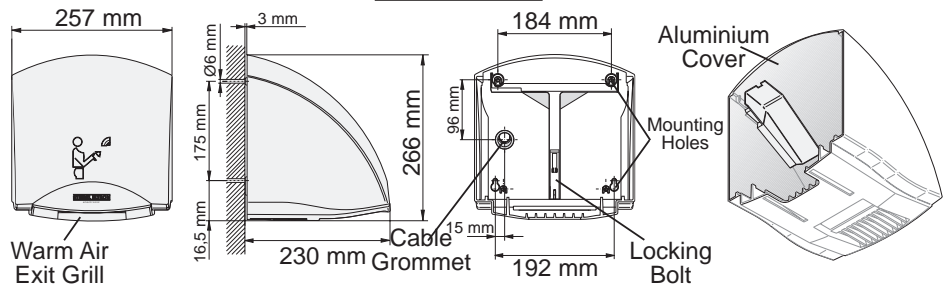

Scent Cartridge / Air Freshner

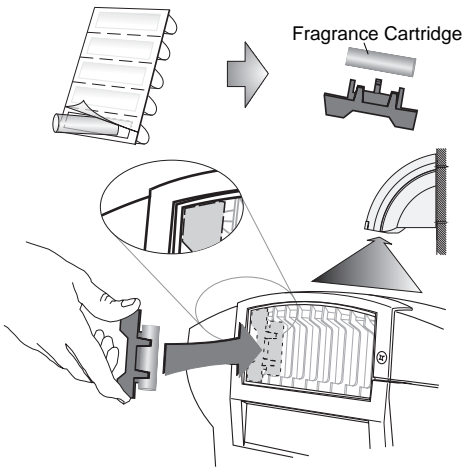

Hand Drying with a Breath of Fresh Air

Stiebel Eltron adds a new touch with a unique fragrance dispenser which attaches to the "warm air" exit grill of the hand dryer, It freshens up the environment every time the hand dryer is used. The fragrance cartridge lasts for about 4 to 6 weeks then has to be replaced, The unit is boxed with two cartridges and more can be ordered under the following order codes; HTE5 & HTT5; #16 82 14; HTE4 & HTT4; #16 82 13.

Technical Data	Bill of Quantities Description	HTE 4 Electronic	HTT 4 WS Turbotronic	HTE 5 Electronic	HTT 5 WS Turbotronic	HTT 5 AM Turbotronic	HTT 5 SM Turbotronic
	Colour	White				Charcoal/Black	Silver Matallc
Cover Material	Polypropylene		Heavy Duty - Aluminium				
Air Flow (m ³ /h)	146	250	146	250	250	250	
Total Load (kW)	1.8 kW	2.6 kW	1.8 kW	2.6 kW			
Element Load (kW)	1.730 kW	2.5 kW	1.730 kW	2.5 kW			
Fan Load (W)	70 W	100 W	70 W	100 W			
Electric Connection	1/N 220-240V 50/60Hz						
Weight - Kg	2,5kg	2,7kg	4,0kg	4,2kg			
VDEW approval	Yes						
SABS approval	Yes						
Dim.(H/W/D) mm	250/238/230			266/257/230			
Protection Class	IP 23 (splash-water proof) / II (protective insulation)						
Wall Mounting Hight	1250 - 1350mm from floor & No less >127mm from a corner wall						